

Specifications

Sizes* shown in HSL35 Lapis 3D

12 x 36



Sizes

Field Tile - Ceramic

Nominal Size (in)	Actual Size (cm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 36 Flat	30 x 90	10.5	2	Pearlescent
12 x 36 3D*	30 x 90	12	2	Pearlescent


This product is rectified

Minimum 2mm grout joint recommended.

* 3 D tiles are directional - there is an arrow on back of the tile to show direction

Shade & Texture Index

Hide and Sleek has a shade variation of V1

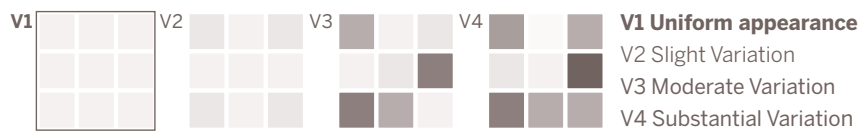

Differences among pieces from the same production run are minimal.

Product Performance

Water Absorption	14.0% – 20.0%	ASTM C373
Breaking Strength	≥300 lbf	ASTM C648
Bond Strength	≥200 lbf	ASTM C482
Facial Dimension	±0.10%	ASTM C499
Range of Thickness (in)	0.025	ASTM C499
Warpage - Diagonal	±0.30%	ASTM C485
Wedging	±0.25%	ASTM C502
Frost Resistance	N/A	ASTM C1026
Chemical Resistance	Unaffected	ASTM C650
Scratch Hardness	6	Mohs

Recommended Use

Hide and Sleek tile is recommended for interior vertical surfaces in residential and commercial applications.

Our Warranty

Regular cleaning is the best way to keep Hide and Sleek tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed.

Trade Organizations



Environmentally Aware

