

Beyond Calacatta

12x24 Porcelain

mosaic 
Products. Design. Solutions.




15CALCLA1224



15CALOCE1224




15CALGLA1224



2x2 Mosaic



Picket Mosaic

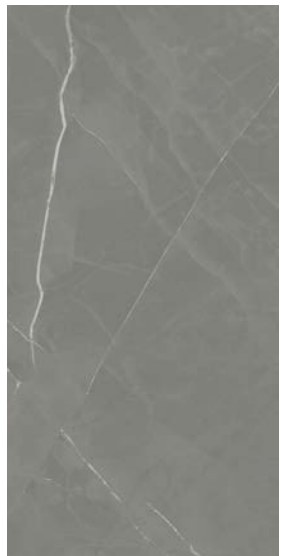

15CALGRA1224



15CALBLA1224



3D Etch Wall
(CLA, OCE, GLA only)



Tile: 12x24 - 24x48
Wall Tile: 12x24 3D Etch Wall
Mosaics: 2x2 - Picket
Trim: 3x24 Bullnose - 6x12 Cove Base

*12x24 available in matte finish only;
Matte and Polished finishes available in 24x48
24x48 Polished is made in Italy*

*For more information
and images:*





Technical Characteristics

Characteristic	Test Method	Porcelain Tile Specification		Value
		Calibrated	Rectified	
Nominal Size	ASTM C499	± 3%	- 3% or + 2%	Compliant
Caliber Range		± 0.5% or ± 0.08 in	± 0.25% or ± 0.03 in	Compliant
Thickness		Range: 0.04 in		Compliant
Wedging	ASTM C502	± 0.5% or ± 0.08 in	± 0.25% or ± 0.03 in	Compliant
Warpage Edge	ASTM C485	± 0.75% or ± 0.09 in	± 0.40%	Compliant
Warpage Diagonal		± 0.5% or ± 0.08 in	± 0.40% or ± 0.07 in	Compliant
Water Absorption	ASTM C373	≤ 0.5%		≤ 0.5%
Breaking Strength	ASTM C648	Average ≥ 250 lbf; Individual ≥ 225 lbf		≥ 350 lbf avg
Bond Strength	ASTM C482	≥ 50 psi		≥ 100 psi
Resistance to Freeze/ Thaw Cycling	ASTM C1026	As Reported		Resistant
Thermal Shock Resistance	ASTM C484	As Reported		Resistant
Chemical Resistance	ASTM C650	As Reported		Unaffected
Stain Resistance	ASTM C1378	As Reported		Unaffected
				Matte Polished
Dynamic Coefficient of Friction (DCOF)	ANSI A326.3	As Reported		≥ 0.42 Wet ≥ 0.42 Dry

Nominal Size	Actual Size	Thickness	Finish	Rectified
12" x 24"	11.75" x 23.62"	9 mm	Matte	Yes
12" x 24" 3D Etch Wall	11.75" x 23.62"	9 mm	Matte	Yes
24" x 48"	23.62" x 47.25"	9 mm	Matte or Polished	Yes
2" x 2" Mosaic	11.75" x 11.75"	9 mm	Matte	-
Picket Mosaic	12.28" x 11.71" (4.7" x 1.9" piece)	9 mm	Matte	-
3" x 24" Bullnose	2.83" x 23.62"	9 mm	Matte or Polished	-
6" x 12" Cove Base	5.91" x 11.81"	8.5 mm	Matte	-

All tile is subject to variations in technical specifications and performance due to the inherent variables in the raw materials and production process. It is understood that test results on a particular product may vary slightly from tile to tile and from test to test. Test results are not guarantees of minimum or maximum thresholds of performance.