


Kaleidoscope Series • Spanish Handmade Tiles 16 Colors in 4 Sizes 2-1/2 x 8 • 3 x 6 • 3 x 12 • 1 x 12 Bullnose

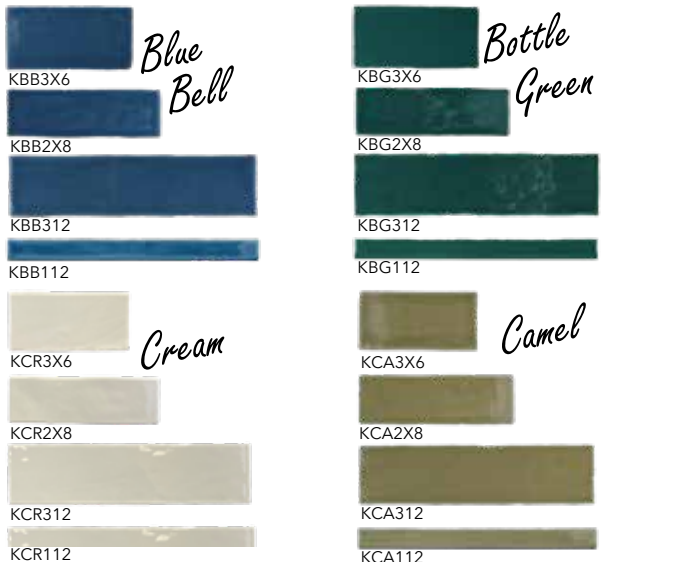

| Standard Norms      | Characteristic   | Average Values of Production   |
|---------------------|--|--|
| UNE-EN-ISO 10545-2  | Length & Width   | + 0.2%   |
|                     | Thickness  | + 5.6%   |
|                     | Surface quality  | 99% of the tiles are free from visible defects                       |
| UNE-EN-ISO 10545-3  | Water Absorption   | Group Bill > 10%   |
| UNE-EN-ISO 10545-4  | Breaking load  | 345 N  |
|                     | Modulus of rupture   | 14 N / mm <sup>2</sup>   |
|                     | Breaking strength  | 638 N  |
| EN 101: 1991        | Scratch hardness of surface according Mohs                   | Class 4 (12000 rev)  |
| UNE-EN ISO 10545-7  | Resistance to surface abrasion for glazed tiles . PEI method | Class 4 (12000 rev)  |
| UNE-EN ISO 10545-11 | Cracking resistance  | Resistant. (Tiles tested are free from crazes on the glazed surface) |
| UNE-EN ISO 10545-13 | Resistance to low concentrations of acids and alkalis        | GLA Non-visible effects  |
|                     | Resistance to high concentrations of acids and alkalis       | GLA Non-visible effects  |
|                     | Resistance to domestic products and swimming pool salts      | GLA Non-visible effects  |
| UNE-EN ISO 10545-14 | Resistance to stains   | Class 5  |

Kaleidoscope Series • Spanish Handmade Tiles

28 Colors in 2 Sizes 3 x 6 • 1 x 12 Bullnose

