

# Classica

12x24 Porcelain



75CLACRE1224 (matte)  
75CLACRE1224P (polished)



75CLAGRI1224 (matte)  
75CLAGRI1224P (polished)




75CLACRE1214C



75CLAGRI1214C



75CLACRE2M

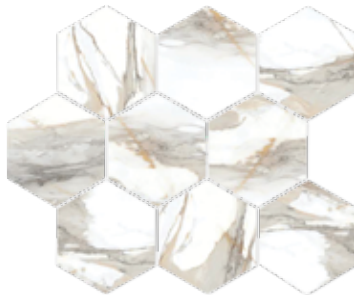

75CLACRE4H



75CLAGRI2M



75CLAGRI4H



### QuickSHIP

Tile: 12x24

Mosaic: 2x2 (CRE only)

*Non-QuickSHIP items are available for commercial projects only. Inquire with a sales representative for additional information.*

Tile: 4x12 - 24x48

Mosaics: 2x2 - 4" Chevron - 4" Hexagon

Trim: 3x12 Bullnose

For more information and images:





## Technical Characteristics

Test Item	Test Method	Test Result
Breaking Strength	ASTM C648	≥ 425 lbs.
Scratch Hardness	MOH'S	7 (Matte); 4-5 (Polished)
Chemical Resistance	ASTM C650-04	Class E
Abrasion Resistance	ASTM C1027	Class III
Thermal Shock Resistance	ASTM C484	Resistant
Frost Resistance	ASTM C1026	Resistant
Water Absorption	ASTM C373	< 0.5%
DCOF (Wet)	ASTM C1028	≥ 0.42 (Matte)
Category of Use	ANSI A326.3	IW (Matte); ID (Polished)

Nominal Size	Actual Size	Thickness	Finish	Rectified
4" x 12"	4" x 11-3/4"	9.0 mm	Matte	Yes
12" x 24"	11-3/4" x 23-9/16"	9.0 mm	Matte or Polished	Yes
24" x 48"	23-9/16" x 47-5/16"	9.0 mm	Matte or Polished	Yes
2" x 2" Mosaic	11-3/4" x 11-3/4"	9.0 mm	Matte	-
4" Chevron Mosaic	11-37/64" x 14-7/32"	9.0 mm	Matte	-
4" Hexagon Mosaic	11-3/4" x 11-3/4"	9.0 mm	Matte	-
3" x 12" Bullnose	2-3/4" x 11-3/4"	9.0 mm	Matte or Polished	-

All tile is subject to variations in technical specifications and performance due to the inherent variables in the raw materials and production process. It is understood that test results on a particular product may vary slightly from tile to tile and from test to test. Test results are not guarantees of minimum or maximum thresholds of performance.

Installation Note: The TCNA recommends rectangular shape tile be installed with maximum of 33% offset in order to resolve any possible lippage from one tile to the next.



For your convenience, select products are stocked in our Central Service Center.