

TABARCA MATTE / GLOSSY

9mm 7,5x23 cm./3x9.1in.

Información Técnica / Technical Information

Icono	Prueba	Norma	Resultado
	DIMENSIONS	UNE EN ISO 10545-2	± 0,5%
	WATER ABSORPTION	UNE EN ISO 10545-3	E > 10%
	CHEMICAL RESISTANCE	UNE EN ISO 10545-13	GA
	FLATNESS	UNE EN ISO 10545-2	± 0,5%
	CRAZING RESISTANCE	UNE EN ISO 10545-11	CUMPLE / ACCOMPLISH
	RESISTANCE TO STAINS	UNE EN ISO 10545-14	5
	BREAKING STRENGTH	UNE EN ISO 10545-4:9	>12 N/MM2
	RESISTANCE TO THERMAL SHOCK	UNE EN ISO 10545-9	CUMPLE / ACCOMPLISH
	BREAKING STRENGTH	UNE EN ISO 10545-4	>600 N excludes 88STABLA39M, 88STAVER39G

Usos / Uses

NO	NO	✓	NO	NO	NO	NO	NO	✓	NO	✓

C = CONSULTAR / CONSULT



TABARCA BLANCO MATTE / GLOSSY

9mm 15x15 cm./5.9x5.9in.

Información Técnica / Technical Information

Icono	Prueba	Norma	Resultado
	DIMENSIONS	UNE EN ISO 10545-2	± 0,5%
	WATER ABSORPTION	UNE EN ISO 10545-3	E > 10%
	CHEMICAL RESISTANCE	UNE EN ISO 10545-13	GA
	FLATNESS	UNE EN ISO 10545-2	± 0,5%
	CRAZING RESISTANCE	UNE EN ISO 10545-11	CUMPLE / ACCOMPLISH
	RESISTANCE TO STAINS	UNE EN ISO 10545-14	5
	BREAKING STRENGTH	UNE EN ISO 10545-4:9	>12 N/MM2
	RESISTANCE TO THERMAL SHOCK	UNE EN ISO 10545-9	CUMPLE / ACCOMPLISH
	BREAKING STRENGTH	UNE EN ISO 10545-4	>600 N

Embalaje / Packing

44.44	40	13.2	29.1	60	0.9	54.01


Usos / Uses

NO	NO	✓	NO	NO	NO	NO	NO	✓	NO	✓

C = CONSULTAR / CONSULT

TABARCA COPPER MATTE / GLOSSY

9mm 15x15 cm./5.9x5.9in.

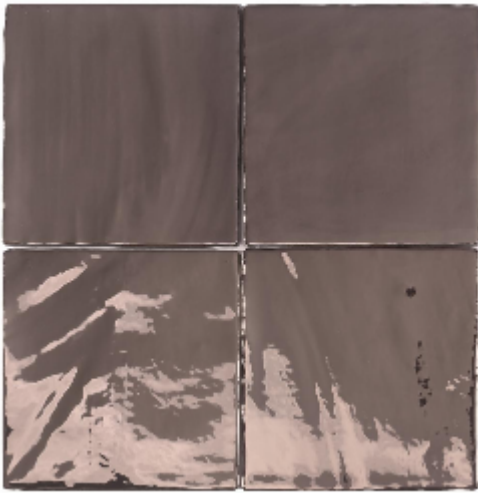

Información Técnica / Technical Information

Icono	Prueba	Norma	Resultado
	DIMENSIONS	UNE EN ISO 10545-2	± 0,5%
	WATER ABSORPTION	UNE EN ISO 10545-3	E > 10%
	FLATNESS	UNE EN ISO 10545-2	± 0,5%
	BREAKING STRENGTH	UNE EN ISO 10545-4	>600 N


Embalaje / Packing

44.44	40	13.2	29.1	60	0.9	54.01

Usos / Uses

NO	NO	✓	NO	NO	NO	NO	✓	NO	✓	

C = CONSULTAR / CONSULT

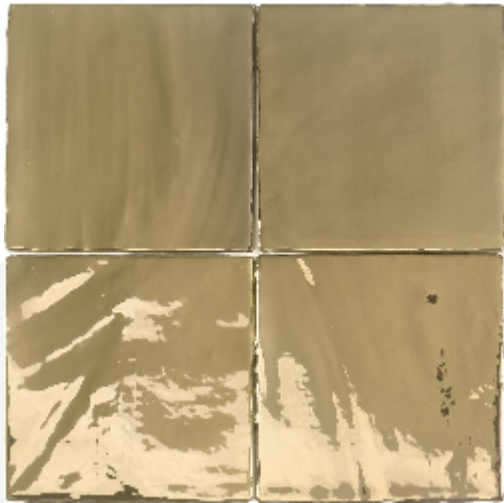

TABARCA GOLD MATTE / GLOSSY

9mm 15x15 cm./5.9x5.9in.

Información Técnica / Technical Information

Icono	Prueba	Norma	Resultado
	DIMENSIONS	UNE EN ISO 10545-2	± 0,5%
	WATER ABSORPTION	UNE EN ISO 10545-3	E > 10%
	FLATNESS	UNE EN ISO 10545-2	± 0,5%
	BREAKING STRENGTH	UNE EN ISO 10545-4:9	>12 N/MM2 Matte finish unrated
	RESISTANCE TO THERMAL SHOCK	UNE EN ISO 10545-9	CUMPLE / ACCOMPLISH Matte finish unrated
	BREAKING STRENGTH	UNE EN ISO 10545-4	>600 N

Embalaje / Packing

44.44	40	13.2	29.1	60	0.9	54.01

Usos / Uses

NO	NO	✓	NO	NO	NO	NO	NO	✓	NO	✓

C = CONSULTAR / CONSULT



188247 TABARCA MIEL GLOSSY

9mm 15x15 cm./5.9x5.9in.

Información Técnica / Technical Information

Icono	Prueba	Norma	Resultado
	DIMENSIONS	UNE EN ISO 10545-2	± 0,5%
	WATER ABSORPTION	UNE EN ISO 10545-3	E > 10%
	CHEMICAL RESISTANCE	UNE EN ISO 10545-13	GA
	FLATNESS	UNE EN ISO 10545-2	± 0,5%
	CRAZING RESISTANCE	UNE EN ISO 10545-11	CUMPLE / ACCOMPLISH
	RESISTANCE TO STAINS	UNE EN ISO 10545-14	5
	BREAKING STRENGTH	UNE EN ISO 10545-4:9	>12 N/MM2
	RESISTANCE TO THERMAL SHOCK	UNE EN ISO 10545-9	CUMPLE / ACCOMPLISH
	BREAKING STRENGTH	UNE EN ISO 10545-4	>600 N

Embalaje / Packing








44.44	40	13.2	29.1	60	0.9	54.01

Usos / Uses











NO	NO	✓	NO	NO	NO	NO	✓	NO

C = CONSULTAR / CONSULT

Icono embalaje

 Pieza/m2 Piece/sqm	 Piezas/caja Pieces/box	 Kg/caja Kg/box	 Libras/caja Lbs/box
 Cajas/pallet Boxes/pallet	 M2/caja sqm/box	 M2/pallet Sqm/pallet	

Iconos usos

 Outdoor walls Outdoor walls	 Outdoor floors Outdoor floors	 Indoor walls Indoor walls	 Indoor floors Indoor floors
 Commercial flooring Commercial flooring	 Underfloor heating installation Underfloor heating installation	 Shower floor Shower floor	 Shower wall Shower wall
 Swimming pool. Wall and floor (depth>1,5m) Swimming pool. Wall and floor (depth>1,5m)	 Walls high vapor condensation areas Walls high vapor condensation areas		

ATTENTION

Carefully follow these instructions to ensure correct installation.

- Installation should be carried out by a qualified professional.
- Before installing ensure that the material is in perfect condition. Make sure you check the colours, finishes and thicknesses because claims or returns of material after it has been installed will not be accepted.
- Before each stage, on one part test all of the materials and tools to be used and evaluate the final finish of the test. Should you fail to achieve the desired results do not continue with the installation, and consult our sales team.
- In public places materials must comply with the slipperiness requirements.
- This document is purely commercial and may not be used in any legal or administrative proceedings, neither as an expert opinion nor as documentary evidence.