


# Glazed Porcelain




88PICWHI12 (glossy)



88PICCEL12 (glossy)




88PICBLA12 (glossy)

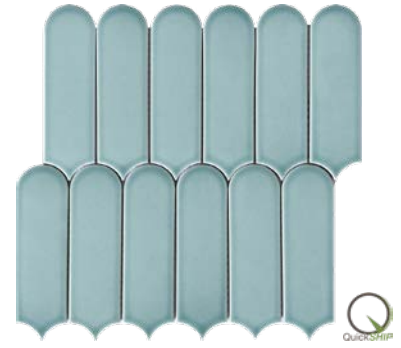

88FEACEL12 (glossy)



88STKWHI12 (Glossy)



88STKCEL12 (Glossy)




88STKBLA12 (Glossy)



88STKTEN12 (Glossy)



88HEXTEN3M (matte)

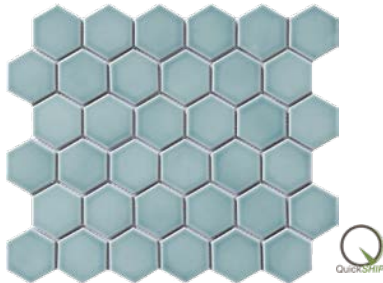

88HEXCEL2G (glossy)



QuickSHIP (noted items only; COMING SOON)

Mosaics: Picket - 2" Hexagon -  
3" Hexagon - Feather

Special Order

Mosaics: Stacked

For more information  
and images:



## Technical Characteristics

Test Item	Test Method	Test Result
Water Absorption	ASTM C373	≤ 0.5%
Breaking Strength	ASTM C648	≥ 250 lbf
Scratch Hardness	MOH's Scale	3
Chemical Resistance	ASTM C650	Unaffected
Frost Resistance	ASTM C1026	Resistant
Minimum Bond Strength (PSI)	ASTM C482	≥ 50 PSI
Dynamic Coefficient of Friction	A137.1	≥ 0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	ASTM C499	Pass
Range of Thickness	ASTM C499	Pass
Warpage	ASTM C485	Pass
Wedging	ASTM C502	Pass

Nominal Size	Thickness	Finish	Rectified
.75" x 6" Stacked	6 mm	Glossy	-
1.5" x 3.5" Picket	6 mm	Glossy	-
2" x 2" Hexagon	6 mm	Glossy	-
2" x 6" Feathers	6 mm	Glossy	-
3" x 3" Hexagon	6 mm	Matte	-

Mosaics sold by 12" x 12" Sheets



For your convenience, select products are stocked in our Central Service Center.